



PRODUKTINFORMATION

VERTIKALE SCHMUTZWASSER UND ENTWÄSSERUNGSPUMPE

BAUREIHE 123G


PRODUCT INFORMATION

VERTICAL SLOPS WATER DRAINAGE PUMP

TYPE SERIES 123G



BAUREIHE 123G | TYPE SERIES 123G

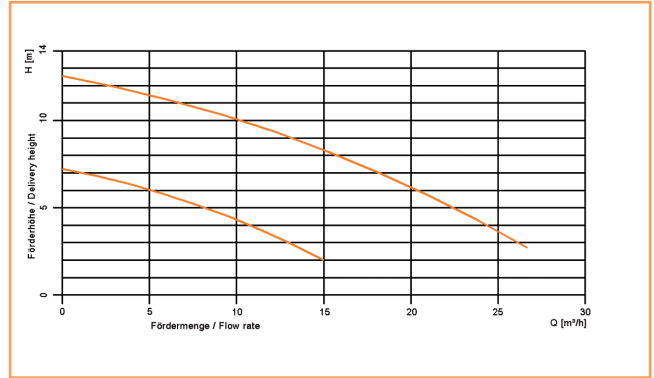

Beschreibung:

Eintauchpumpen der Baureihe 123 G sind einstufige Spiralgehäusepumpen mit Zwischenrohr und Kanalrad.

Leistungsbereich:

Fördermenge Q: bis 45 m³/h
Förderhöhe H: bis 21 m
Einbautiefe H: bis max. 2 m
Mediumtemperatur t: 0°C bis +90°C

Einsatzgebiete:

- Entwässerung
- Industrie
- Anlagenbau

Fördermedien:

Reines oder leicht verschmutztes Kaltwasser, Regenwasser, chemisch neutrale Kondensate.

Vorteile:

- Anschlüsse mit Gewindegegenflanschen
- Langlebig und robust, daher geringe Reparaturanfälligkeit und niedrige Folgekosten
- Ausgereifte Konstruktion

Werkstoffe:

Die Standardwerkstoffe für Pumpengehäuse und Laufrad sind Grauguss. Die Werkstoffe können aber den Anforderungen entsprechend angepasst werden.

Antrieb:

Geräuscharmer IEC-Norm- Drehstrommotor, in Effizienzklasse IE 2/ IE 3 oder Wechselstrommotor. Andere Ausführungen und Motorarten auf Anfrage lieferbar.

Description:

Immersion pumps type series 123 G are single-stage spiral casing pumps with intermediate pipe and open impeller.

Operating data:

Flow rate Q: up to 45 m³/h
Delivery height H: up to 21 m
Installation depth H: up to max. 2 m
Medium temperature t: 0°C up to +90°C

Range of application:

- Drainage
- Industry
- Plant engineering

Pumping media:

Clean or slightly soiled cold water, rain water, chemical neutral condensates.

Benefits:

- Inlet and outlet with thread counter flange
- Long-lasting and robust, therefore less susceptible to failure and lower follow-up costs
- Fully developed construction

Materials:

The standard materials for pump casing and impeller are cast iron. But materials can be customized according to individual demands.

Drive:

Low noise IEC- standard three phase motor according to efficiency class IE2/ IE3 or single phase motor. Other executions and types of engines on special request possible.



Winter.pumpen GmbH

An der Autobahn L 2 · D-91161 Hilpoltstein
Tel.: (0 91 74) 9 72 - 0 · Fax: (0 91 74) 9 72 49
info@winter-pumpen.de · www.winter-pumpen.de